


2D Desktop Barcode Scanner

NBS-8202

sewoo

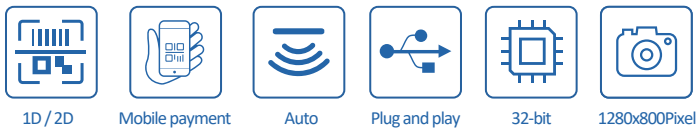

- The best cost-performance desktop scanning solution.
- Compatible with Linux, Android, Windows XP7/8/10/MAC OS.
- Plug and play. No need to install the driver.
Support POS systems, cash registers.
- With larger angles, adjustable omni-directional scanning head meets various needs.
- High speed and reliable performance on all common 1D and 2D codes.



Light Source	Red LED (Lighting) Color Temperature 650nm LED	Size	L x W x H: 98x98x152(mm)
CPU	32-bit Processor	Weight	350g(Including cable)
Scan Mode	Continuous Scan	Case Material	ABS+PC
Image Size	1280x800 Pixel	Input Voltage	DC 5V
Scanning Speed	60 fps/s	Working Current	<450mA
Mobile Tolerance	1.5m/s	Stand-by Current	<236mA
Minimum Resolution	>3mil	Indicator	Tone and Volume adjustable
Scanning Direction	Omnidirectional	Interface	USB-HID, RS-232, USB-VCP
Scanning Angle	Deflection 360° Inclination ±65° Rotation ±60°	Cable	Straight 1.8m
Decoding Depth	5~280mm@(13mil UPC/EAN 100%, PCS=90%)	Temperature(Operating)	-10°C ~ 50°C
Decoding Capability	1D: Codabar, Code11, Code39, Code32, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Code93, Code128, GS1-128, UPC-A, UPC-E, EAN 8, EAN 13, GS1 DataBar(RSS14), GS1 DataBar Limited, GS1 DataBar Expanded, etc 2D: PDF417, Micro PDF417, QR Code, Micro QR, Data Matrix, Aztec Code	Humidity	5% to 95% (non-condensing)
		Temperature(Storage)	-20°C ~ 50°C
		Light Levels	0 ~5000 Lux (fluorescence), 0 ~ 100,000 Lux (sunlight)